

100 Series



WIH-100 Hybrid Unit




WIU-101 User Station




WIS-100C Intercom Camera Station




WIS-101C Camera Station 5CH Expander

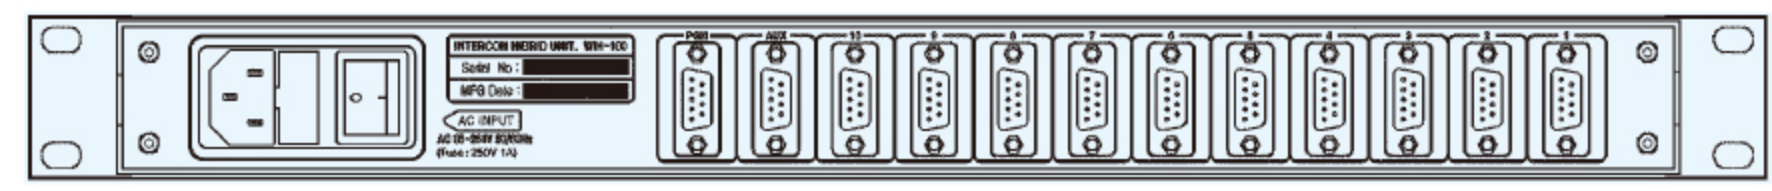


Rear View

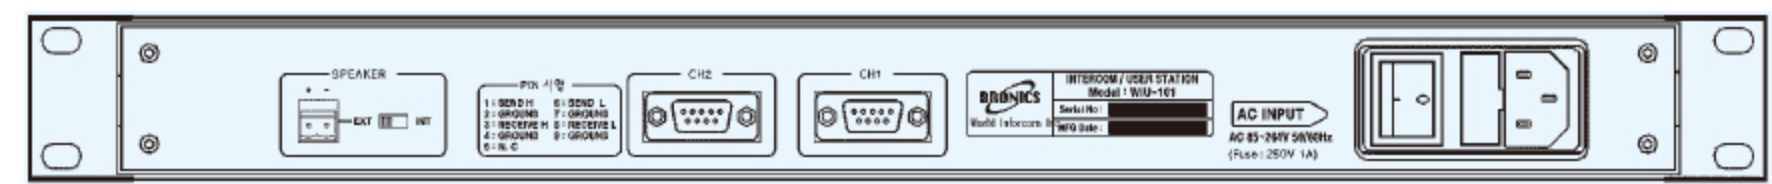

Rear View

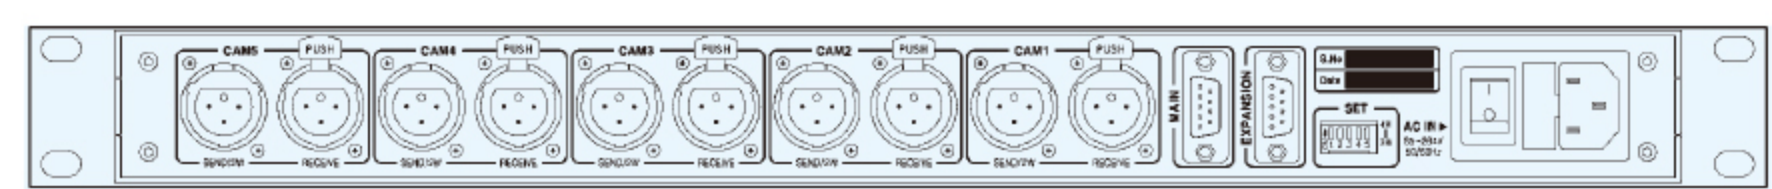

Rear View

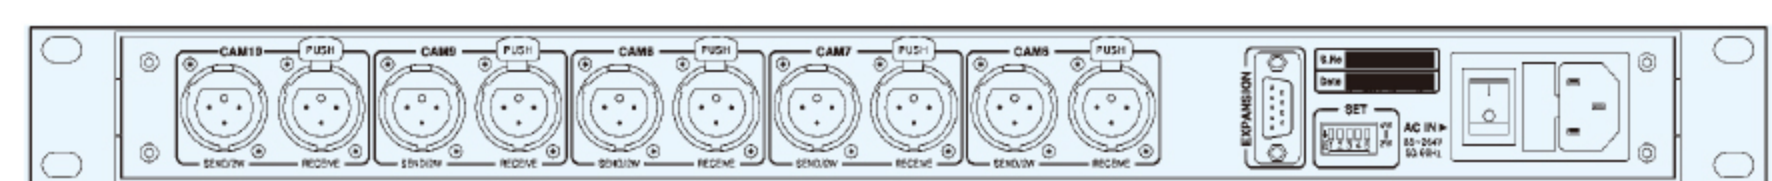

Rear View



WIS-100B
Intercom Belt Pack

Intercom system 100 series(WIH-100, WIU-101)는 사용하는 모든 user station의 스피커가 개방되어 있는 방식으로서 talk시에는 모든 user station에 일방적으로 음성이 전달된다. 방송프로그램 제작 시 단위별 조정실에서 동시에 communication이 가능해야 하는 경우에 적합한 system이다. 4 Wire 방식으로 설치 및 사용방법이 매우 간단하며, wireless intercom등 주변 장치와 접속이 가능하다. Camera station(WIS-100C)는 4wire/2wire 겸용 5channel로 구성되어 있으며 5 channel extender(WIS-101C)를 함께사용하면 10channel로 확장된다. Camera CCU와 접속되어 별도의 추가 장비 없이 Camera와 통화기능을 수행한다. 또한 hybrid unit(WIH-100)와 접속이 가능하다. Microphone은 기본으로 제공된다.

Features

WIH-100 / WIU-101

- 12 Channel user station, MAX (WIH-100)
- Internal speaker with volume control
- 20 dB Dimming control
- Channel on/off switch
- Talk switch
- Headset on/off switch

WIS-100C

- 5 channel camera talk back
- 5 channel extender(WIS-101C)
- 4wire / 2wire 겸용
- Send / receive level control
- Internal speaker with volume control
- Talk switch

Ordering Information

- WIH-100 Hybrid unit
- WIU-101 User station with microphone
- WIS-100C Camera station with microphone
- WIS-101C Camera station 5CH Extender



Microphone

Technical Specification

Intercom Hybrid Unit (WIH-100)

- User station channel 10+2CH(MAX)
- Send/receive level 0dBu
- Send/receive impedance 600 ohms, Transformer balanced
- Frequency response ±1dB (50 ~ 15000Hz)
- S/N Ratio 65dB (20 ~ 20000Hz B.W)
- THD 0.1% (50 ~ 14000Hz)
- Operating temperature 0°C ~ 40°C
- Power AC 85 ~ 264V 50/60Hz
- Dimensions 483(W) × 44(H) × 350(D)mm


Intercom User Station (WIU-101)

- Send/receive level 0dBu
- Send/receive impedance 600 ohms, Transformer balanced
- Speaker output 0.5 ~ 1W (MAX)
- Speaker impedance 8 ohms
- Speaker dimming control 20dB
- Number of channel 2 CH
- Operating temperature 0°C ~ 40°C
- Power AC 85 ~ 264V 50/60Hz
- Dimensions 483(W) × 44(H) × 200(D)mm

Intercom Camera Station (WIS-100C)

- Send/receive level 0dBu
- Send/receive impedance 600 ohms, Transformer balanced
- Camera channel 5CH 4wire / 2wire
- Speaker output 0.5W ~ 1W (MAX)
- Speaker impedance 8 ohms
- Speaker dimming control 20dB
- Operating temperature 0°C ~ 40°C
- Power AC 85~264V 50/60Hz, 30W MAX
- Dimensions 483(W) × 44(H) × 350(D)mm

Application

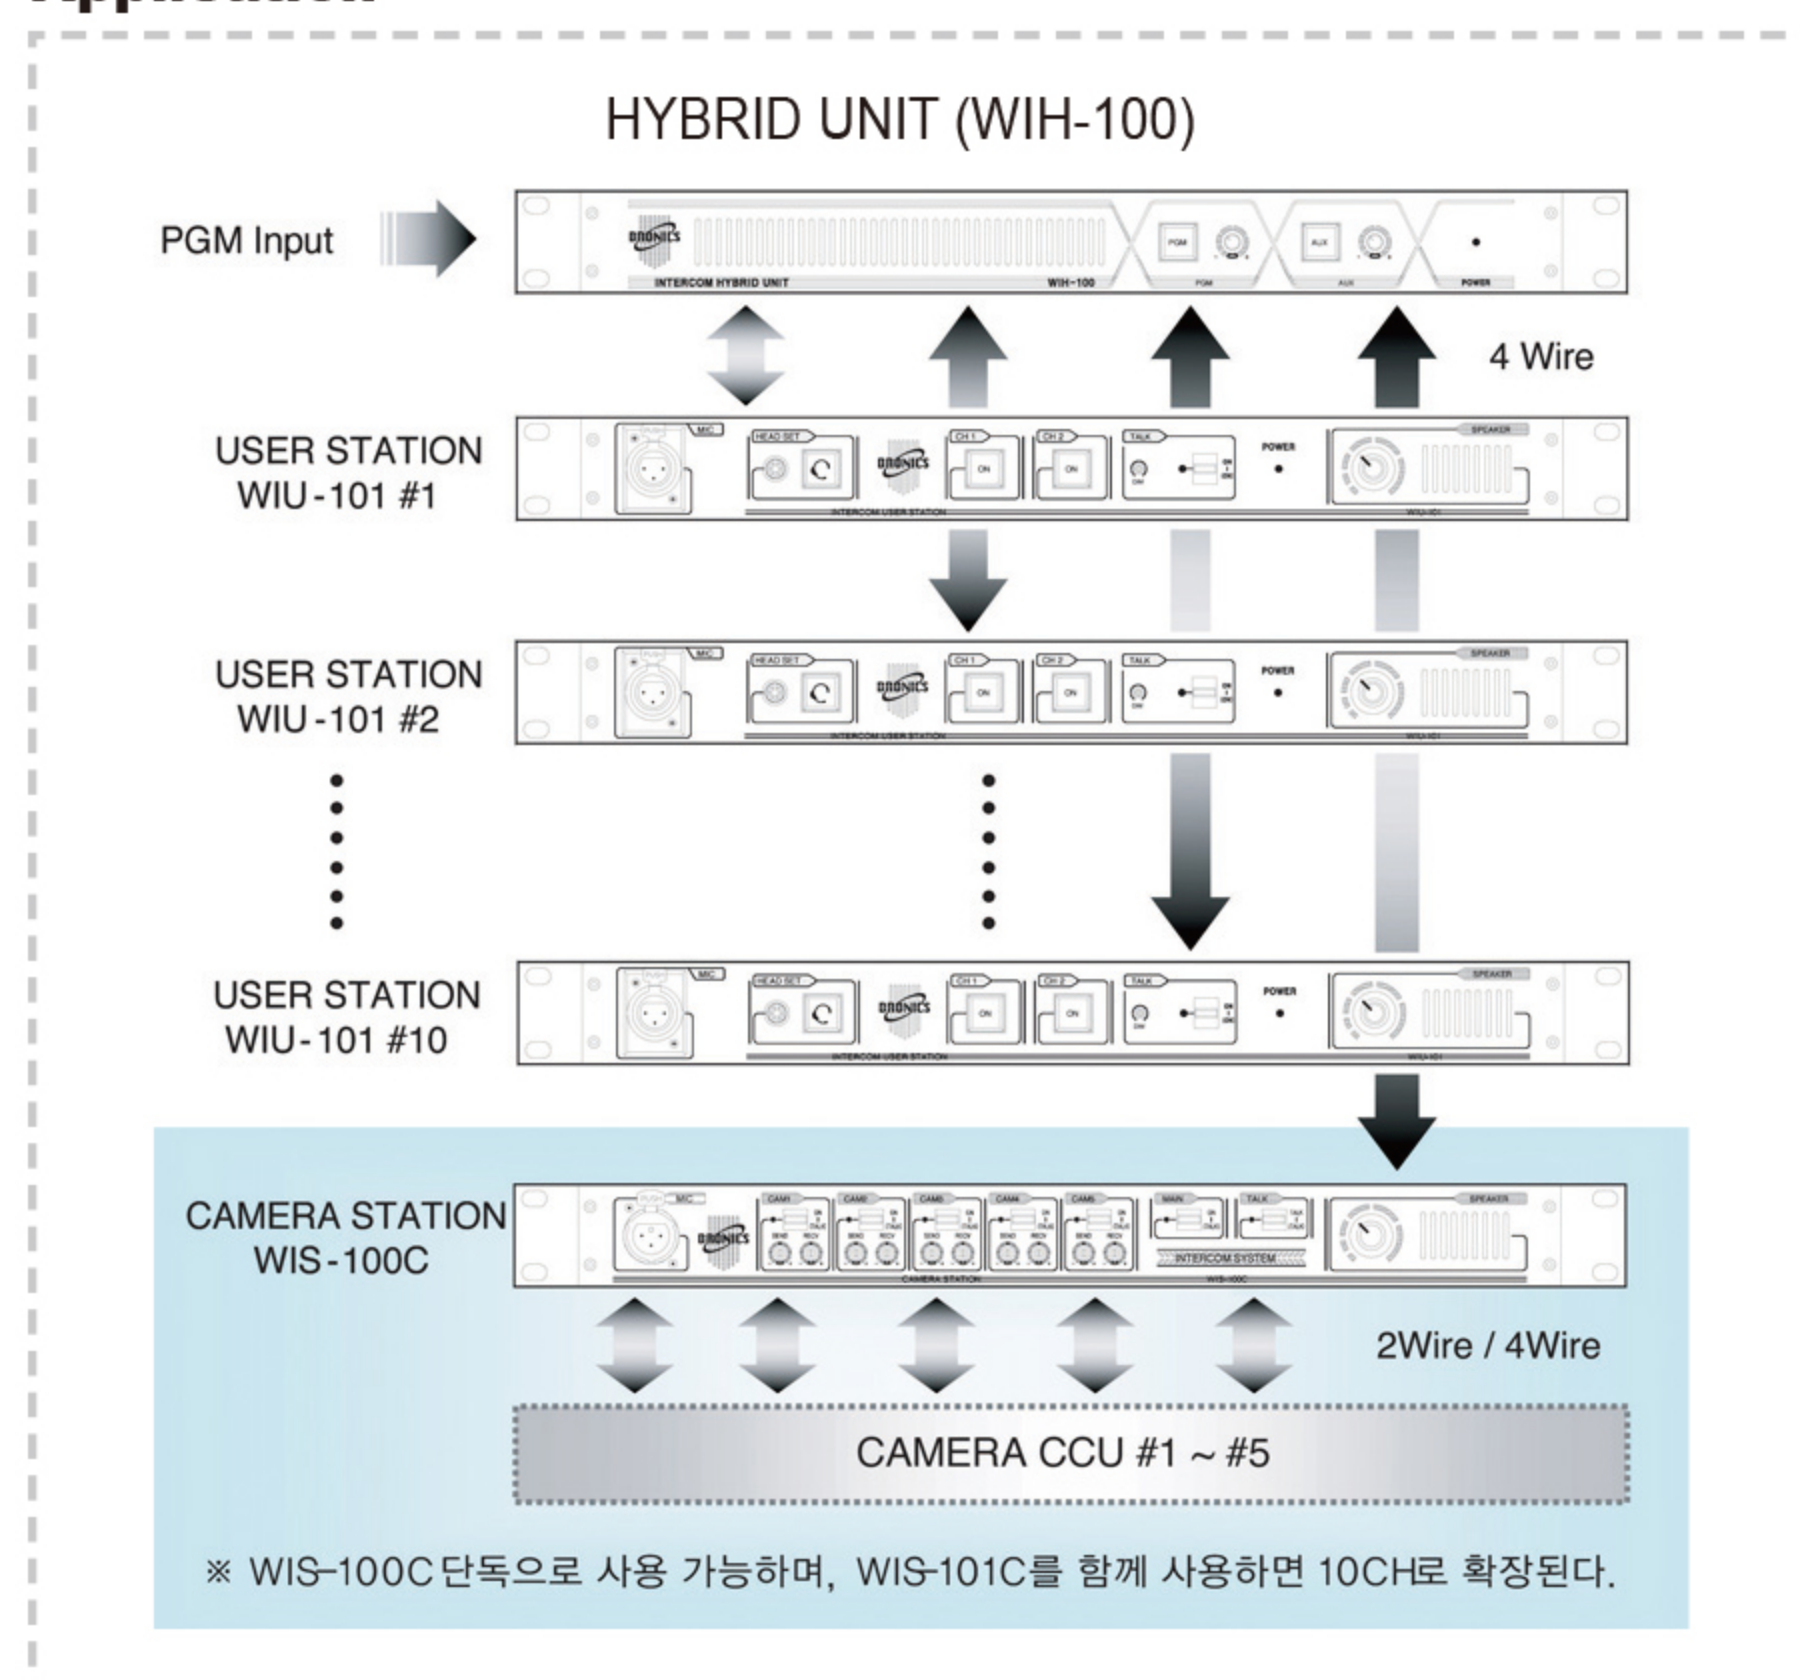

Note : Specifications are subject to change without notice