

WCR-200 Series



WCR-200H Housing & Control System
WCR-200P PAN/TILT Drive

Features

- Max. 350. 회전 파노라마HD Camera System
- 4대의 파노라마 카메라 원격조정 가능
- CCU 기능 원격조정 가능
- 32 Scene Memory Function(16 scene 2 Page)
- Joy Stick PAN/TILT Control System
- Lens Zoom, Focus 원격조정 가능
- Heating System in the Housing(겨울철)
- Cooling System in the Housing(여름철)

Ordering Information

- HD Camera and Lens (Option:사급)
 - HDC-X300 / HSs 18×5.5BMD-D18
 - HDL-45A / DK-H32
 - HA 18×7.6BMD-DSE
 - HA 23×7.6BERD
 - HJ 22ex×7.6B IASE
- WCR-200H Housing & Control
- WCR-200M Main Controller
- WCR-200P PAN/TILT Drive
- WCR-200T Camera Pole
- WCR-200R Remote Controller
- WCR-200D Data Modem



WCR-200R Remote Controller

Technical Specification

Camera CCU Control Function

- Video Output Camera Video, Color Bar
- Gain Select 0dB, G1, G2
- Auto Balance White & Black
- Master Pedestal Adjust Digital VR
- Red/Blue Pedestal Adjust Digital VR
- Red Gain Adjust Digital VR
- Blue Gain Adjust Digital VR
- IRIS Control Auto/Manual
- IRIS Level Adjust Digital VR (Manual Mode)
- Shutter Control Off, Up, Down
- CCU Lock Lock/Release
- Power Control On/Off


Camera Lens Control Function

- Zoom Function
- Zoom Control Joy Stick
- Speed Control
- Control Data(Position) 12bit
- Focus Function
- Focus Control Digital VR
- Control Data(Position) 12bit

PAN/TILT Drive

- PAN Function
- Pan Control Joystick
- Speed Control
- Control range Left, Right Max. 350.
- Control Data(Position) 16bit
- TILT Function
- Tilt Control Joystick
- Control Range Up, Down Max. 90.
- Control Data(Position) 16 bit

PANORAMA CAMERA DATA MODEM

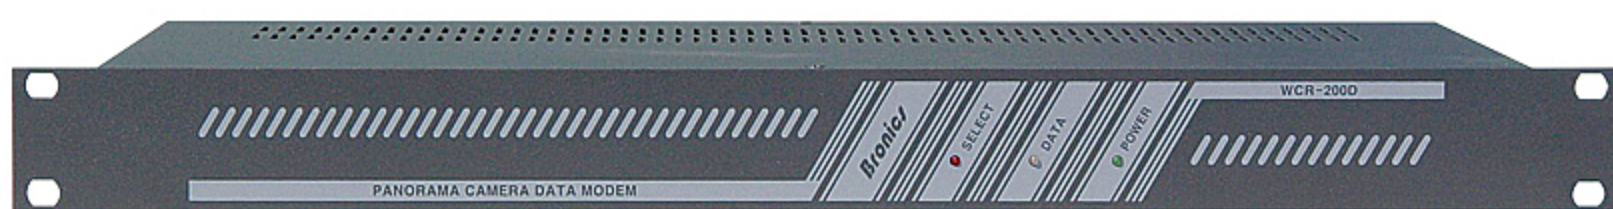

WCR-200D

- 본 System은 제어회선을 음성급 전용회선 사용시 필요
- Data speed 1,200bps
- 사용회선 2 Wire 음성급 전용회선
- 단방향통신
- ※본장비 사용시 Zoom, Focus, Pan, Position 표시는 불가
- ※본장비는 TX 용으로 WCR-200R 에 접속되며 RX Board는 WCR-200M에 내장된다.

Scene Memory

- Function Memory, Page1, Page2, Play
- Memory Data Zoom, Focus, Pan, Tilt Position
- Capacity 1~16 Memory per Page
- 1~2 Page(Total 32 Memory/Position)
- Any Memory (1~32 Memory Position)
- Play Control

Housing

- Control Wiper & Wash
- Aux Control 2 CH, On/Off
- Temperature Control Auto, Heating & Cooling
- Temperature Display Function
- Temperature Proof Sun Shield

Control Line

- Line RS-485(Shield, Twist 1 Pair)
- Line 수 4Line(CAM1, CAM2, CAM3, CAM4)
- Data Speed 9,600bps/1,200bps
- 여러 대의 Remote접속 가능 (Busy status check)

Sub Control (주변장비 제어)

- Type GPI(Photocoupler)Output
- Output Channel 4CH
- Control On/Off

Video Monitor

- 4" Color LCD Monitor
- Video Input HD/SD - SDI
- Control Sharpness, Contrast, Bright



WCR-200M Main Controller

