



WCU-324F



WCU-324F 4 Wire/2Wire Commentator



Rear View




Front View

WCU-324F는 원격지에서 방송하는데 사용되는 장비로서 아나운서나 리포터가 방송국에서 보내 주는 신호를 헤드폰으로 들으면서 2개의 마이크와 하나의 Line입력을 4 wire(전용회선)나 2 wire(일반 전화회선)를 이용, 방송을 하도록 해 준다. 특히 중계차나 중계방송에 이용할 수 있다.

Features

- Desk Top Type
- 1 KHz Tone Oscillator
- Telephone 탑재
- 10 dot LED Level Meter 및 Selector
- 4 Wire(전용회선)/2 Wire(일반전화회선) 사용가능
- 각입력별Level조정용VR
- Fader 및VCA를사용한회로
- 내부스피커및헤드폰조정용VR
- 2 CH 마이크, 1 CH AUX 입력
- Free Voltage(AC 85 264 볼트, 50/60 Hz)

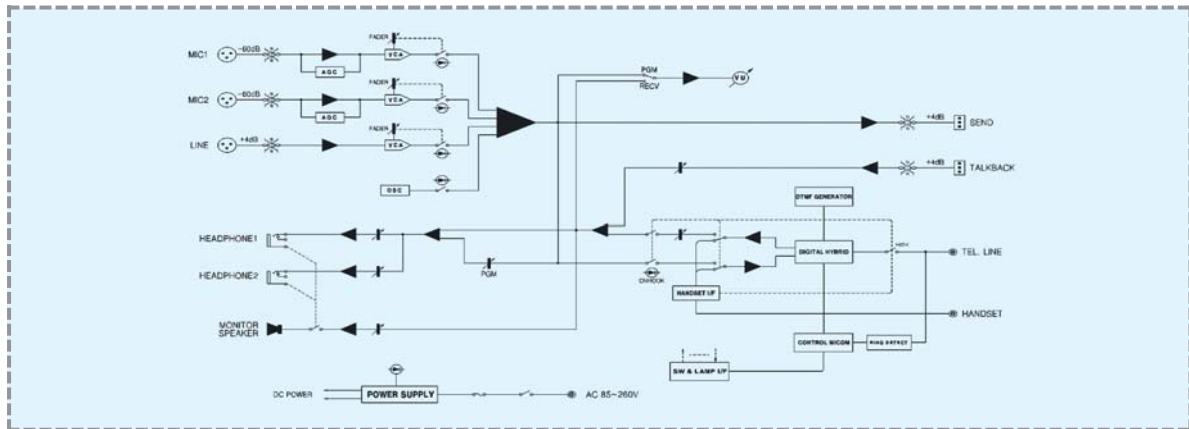

Technical Specification

Input		Output	
Mic Level	-50 dBu Normal	PGM/SEND Level	+4 dBu Normal
Impedance	150 ohm Transformer Balanced	Impedance	600 ohm Transformer Balanced
Aux Level	+4 dBu Nominal	Monitor Output	
Impedance	600 ohm Transformer Balanced	Headphone	300 ohm Active Balanced
Talkback Level	+4 dBu Normal	Speaker	0.5 Watts
Impedance	600 ohm Transformer Balanced	Performance	
Tone Generator	1 KHz	Frequency Response	± 0.5 dB, 20Hz to 20KHz
Level Meter		THD+N	≤ ± 0.5%(20Hz to 20KHz B.W)
Device	LED	Noise(AUX)	≤ -60dB(20Hz to 20KHz B.W)
Display	10 dot	Noise(Mic)	≤ -60db(20Hz to 20KHz B.W)
		Power	AC 85-264 Volts 50/60 Hz
		Dimensions	294(W) x 53(H) x 310(D)mm

Note : Specifications are subject to change without notice