



WCU-404L/R(스포츠 중계용)





WCU-404L Commentary Unit



WCU-404R Commentary Unit / Remote

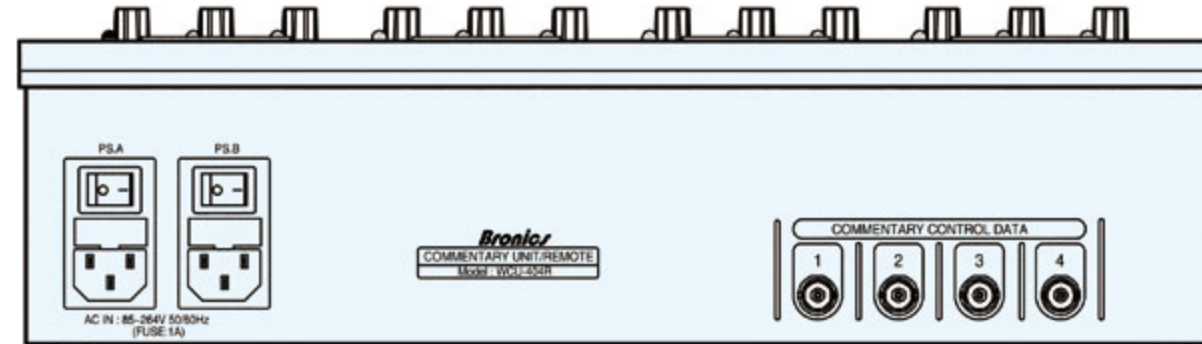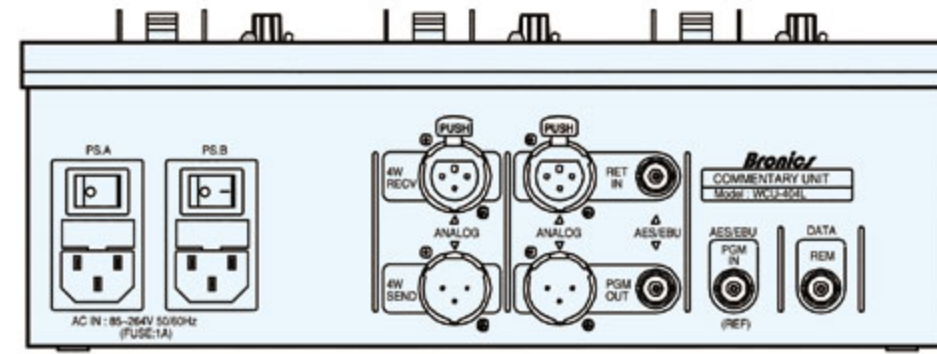

Rear View

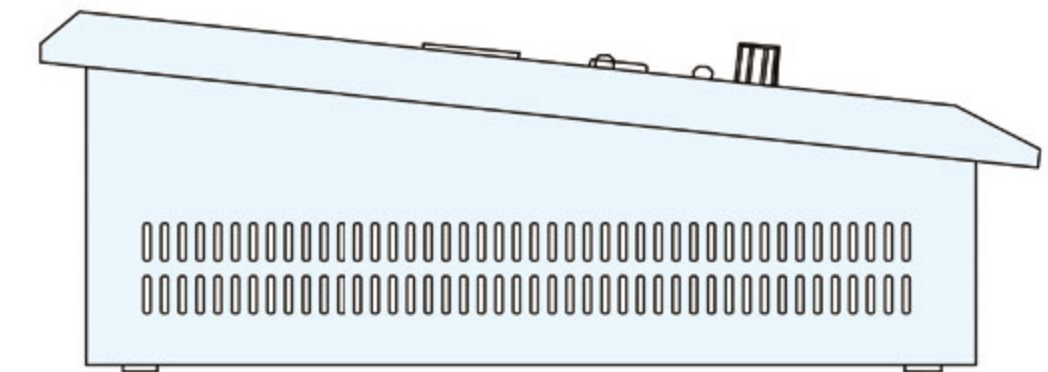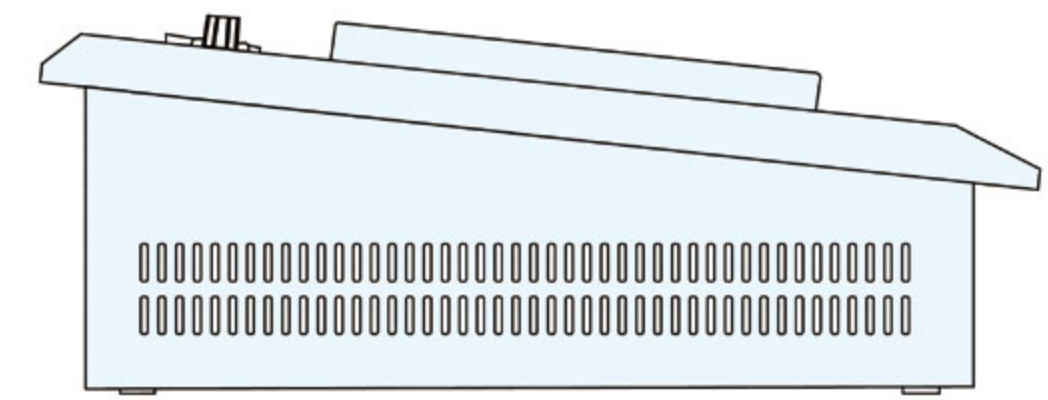

Side View

WCU-404L장비는 4 wire 전용선으로 스포츠 중계시에 아나운서와 해설자가 헤드셋을 이용, 방송되는 프로그램을 모니터하며 현장 중계방송을 진행하기 위한 장비이다. 방송신호의 입출력은 Analog, Digital 모두 가능하다. WCU-404R 없이 단독으로 사용할 수 있다. WCU-404R은 한대의 장비로 WCU-404L 4대를 원격으로 신호의 크기를 감시하면서 조정할 수 있는 장비이다.

Features

WCU-404L

- ▣ 3 CH Commentator(Mic/Headset) by Fader
- ▣ CH 3(Mic / Line selectable)
- ▣ 4 wire SEND / RECEIVE system
- ▣ AES digital IN (RET)/ OUT(PGM)
- ▣ 1 KHz Tone Oscillator
- ▣ VU Level meter
- ▣ Headset volume control
- ▣ Level control by WCU-404R
- ▣ Dual power supply

WCU-404R

- ▣ 4x WCU-404L Remote level control
- ▣ 4 VU level meter
- ▣ Dual power supply

Ordering Information

- WCU-404L Commentary Unit
- WCU-404R Commentary Unit / Remote
- HMD25XQ Headset(Sennhiser)

Technical Specification


WCU-404L

Mic Input	
Impedance	150Ω Transformer balanced
Level	-60dBu / -50dBu (selectable)
Line Input	
Impedance	600Ω Transformer balanced
Level	+4dBm
Line Output	
Impedance	600Ω Transformer balanced
Level	+4dBm
Digital Input(RET)	
Format	AES/EBU
Impedance	110Ω Transformer
Sampling	48KHz
Digital Output(PGM)	
Format	AES/EBU
Impedance	110Ω Transformer
Sampling	48KHz
Tone Oscillator	
Frequency	1KHz
Remote Control	
Data	RS-485
Performance	
Frequency Response	±1dB(20Hz to 20KHz)
THD	<0.5%

General

Power	Free voltage(AC 85~264V) 60Hz
Dimensions	WCU-404L 310(W)×105(H)×283(D)mm WCU-404R 401(W)×99(H)×283(D)mm

Application

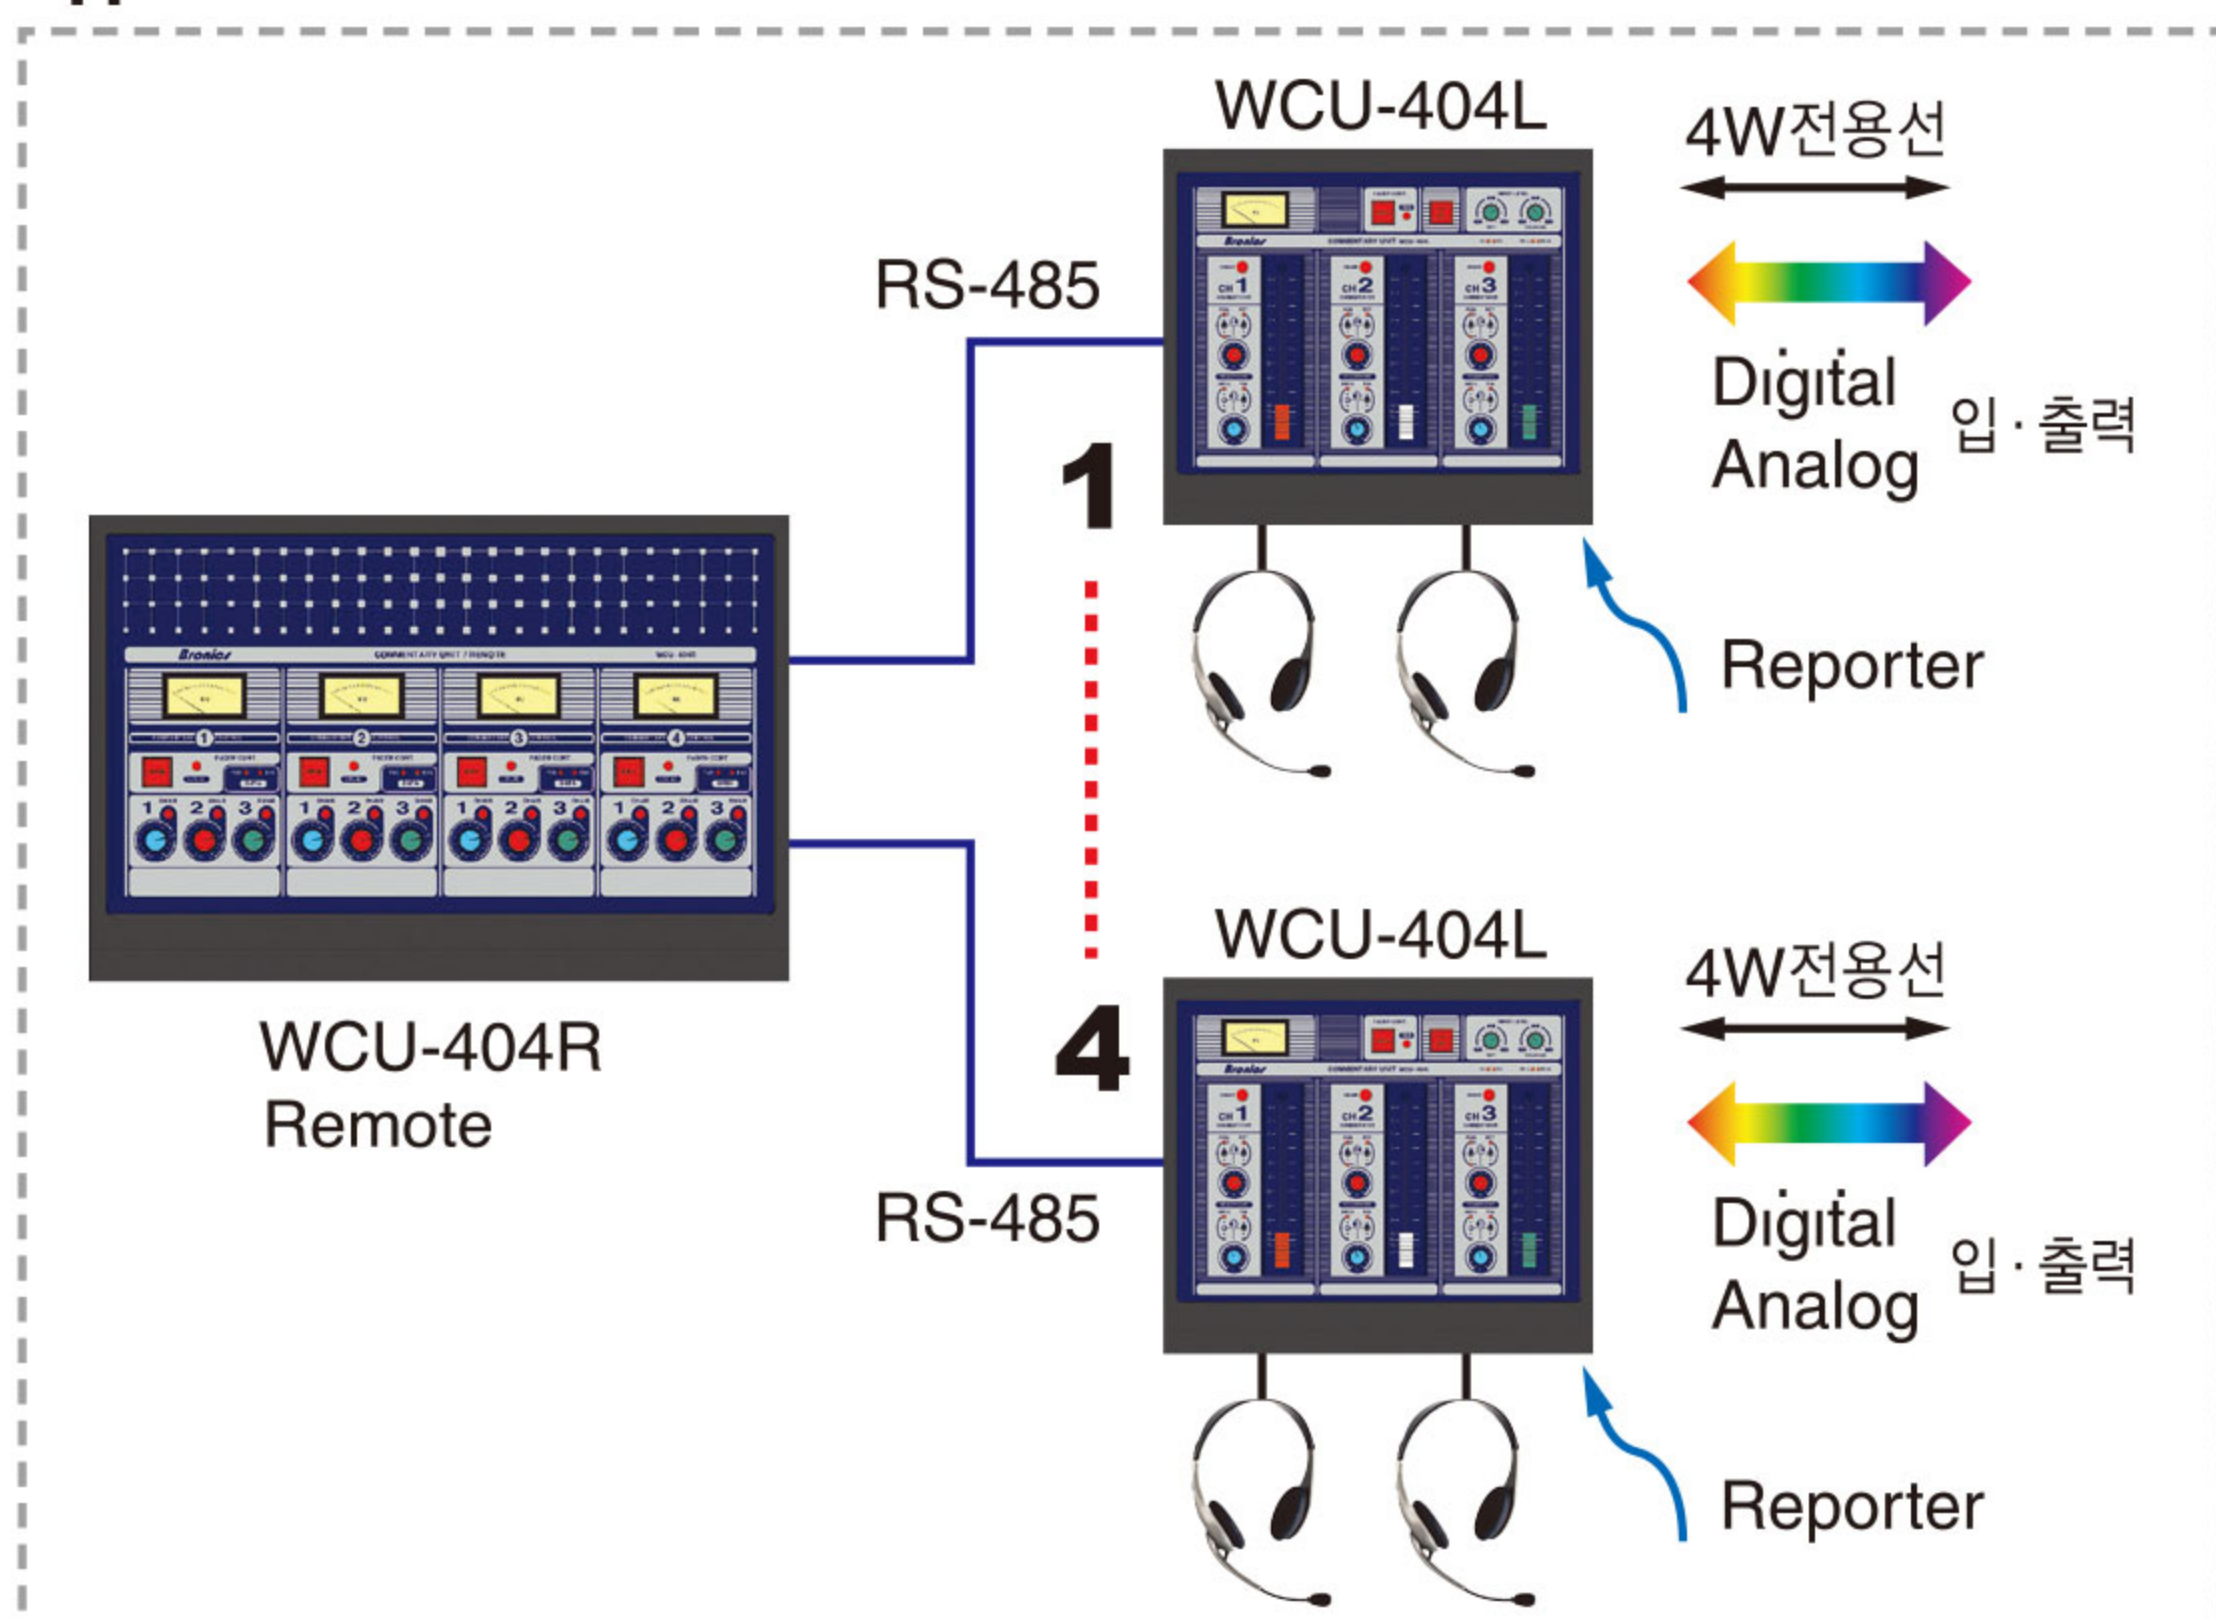

Note : Specifications are subject to change without notice