



WDH-202



WDH-202 Digital Telephone Hybrid



Rear View

전화를 통한 통화 내용을 방송 시스템에 연결하여 프로그램 제작 시 사용하기 위한 접속 장치로서 Telephone multi switcher와 연동 및 단독 사용이 가능하며, DSP에 의한 신호처리로 설치 및 조정이 매우 간편하다. 2개의 전화 회선을 수용하여 2원화 방송이 가능한 2Channel 용으로 단독사용을 위한 Standby Tally 입력이 있다.


Features

- Dual digital hybrid
- 2 Send input
- 2 Receive output
- Take Tally In / Out
- Standby Tally Input
- Tel. S/W interface
- 4 Level meter
- Digital level adjust
- 1 Rack unit type


Technical Specification

Telephone Line Input 2회선	Take Tally In / Out Type Photocoupler Channel 2 CH	Frequency Response ±2dB (300Hz ~ 3.5KHz)
Send Input Impedance 600 ohms transformer balanced Level 4dBu (Normal)	Standby Tally In Type Photocoupler Channel 2 CH	Signal to Noise >60dB
Receive Output Impedance 600 ohms transformer balanced Level 4dBu (normal)	Level Meter Type 10 Dot LED Meter Channel 4 CH (SendX2, ReceiveX2)	THD+N <0.3% (300Hz ~ 3.5KHz)
		Operating Temperature 0°C ~ 40°C
		Power AC 85~264 Volts
		Dimensions 483(W)X44(H)X350(D)mm

Application 1 (Telephone Multi Switcher System)

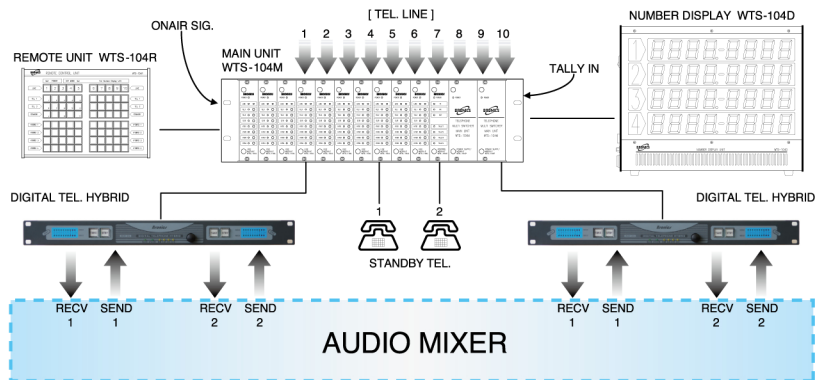

Application 2 (Telephone Hybrid)

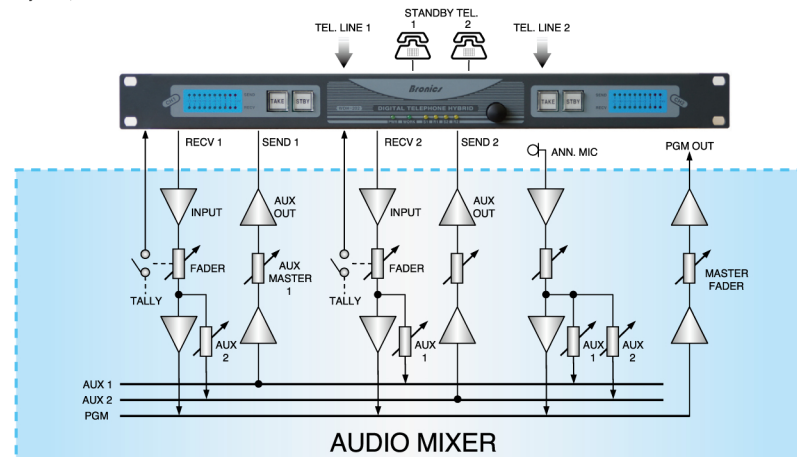

Note : Specifications are subject to change without notice