




WVT - 321

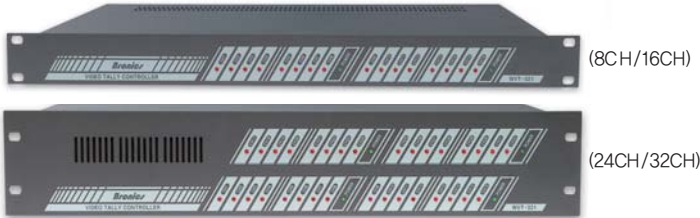


WVT-321 Video Tally Controller

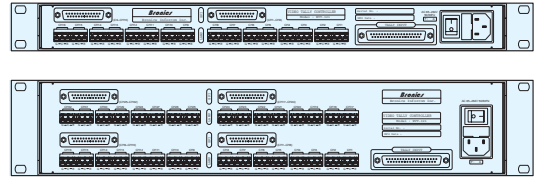

Rear View

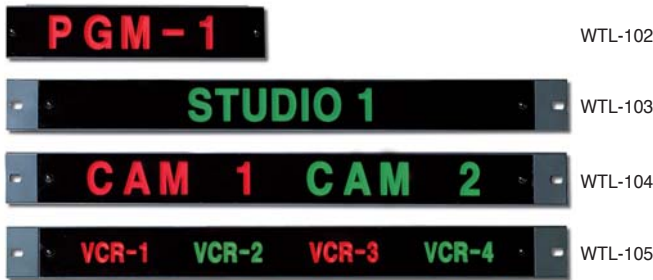

Video Tally Lamp

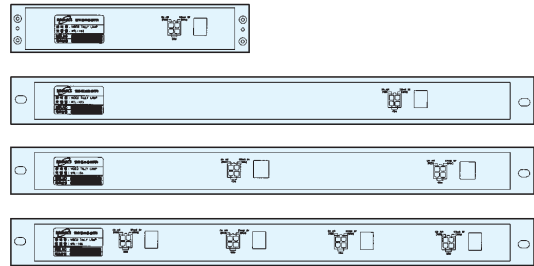

Rear View

Video Tally Controller

방송국 조정실의 Video Switcher와 접속되어 Video 신호(Monitor)의 사용 중 상태를 나타내기 위한 장비로서 문자로 표시된 Video 신호의 램프를 구동하여 Standby시는 녹색, Onair시는 적색 램프를 점등시킨다.

Tally 신호의 입력은 포토커플러에 의하여 구동되며 램프의 출력 회로는 반영구적인 무접점 방식으로 구성되었다.

최대 32채널을 수용할 수 있으며 다른 주변 장비의 구동을 위한 GPI(접점) 출력이 있다.

Video Tally Lamp

Video tally control unit(WVT-321)와 접속되어 Stand by시는 녹색 On air시는 적색으로 표시한다.

LED lamp로 되어 있어 저 전류로 동작되며, 수명이 반영구적이다. 문자 표시부는 Film으로 되어 있으며 문자는 주면에 의해 제작된다.

Features

- 8, 16, 24, 32 Channel (Ordering)
- GPI Output (Ordering)
- Status(Onair) Display (Front)
- Electrical Switching for Lamp Drive
- Free Voltage (Power)
- 19" 1, 2RU Rack Mount Type

Ordering Information

- WVT-321 8CH(1RU)
- WVT-321 16CH(1RU)
- WVT-321 24CH(2RU)
- WVT-321 32CH(2RU)
- w/ GPI Output 16CH, 24CH, 32CH
- WTL-102 Under monitor video tally lamp
- WTL-103 19" Type 1 channel video tally lamp
- WTL-104 19" Type 2 channel video tally lamp
- WTL-105 19" Type 4 channel video tally lamp

Technical Specification

Video Tally Controller(WVT-321)

Input

- Device : Photocoupler
- Channel : 8, 16, 24, 32CH (Ordering)
- Drive Current : ≤10mA/CH
- Connector : D-sub 37pin (Female)

Lamp Output

- Drive Voltage : +13.5V DC
- Drive Current : 300mA/CH, Max
- Channel : 8, 16, 24, 32CH (Ordering)
- Connector : Terminal Block(3pin)

GPI Output

- Type : Dry Contact (Relay)
- Channel : 8CH (Default)
- 16, 24, 32CH (Ordering)

Power : AC85~264V, 50/60 Hz

Dimensions

- 8, 16CH : 483(W)x44(H)x350(D)mm
- 24, 32CH : 483(W)x88(H)x350(D)mm

Video Tally Lamp

WTL-102

Light display 164(W) × 30(H) mm
Display color Stand by - green / on air - red

Power +13.5V DC - 120mA, MAX green
+13.5V DC - 120mA, MAX red
Dimensions 220(W) × 44(H) × 32(D)mm

WTL-103

Light display 260(W) × 30(H) mm
Display color Stand by - green / on air - red
Power +13.5V DC - 150mA, MAX green
+13.5V DC - 150mA, MAX red

WTL-104

Light display 164(W) × 30(H) mm
Display color Stand by - green / on air - red
Power +13.5V DC - 120mA, MAX green per channel
+13.5V DC - 120mA, MAX red per channel
Dimensions 483(W) × 44(H) × 32(D)mm

WTL-105

Light display 64(W) × 30(H) mm
Display color Stand by - green / on air - red
Power +13.5V DC - 60mA, green per channel
+13.5V DC - 60mA, red per channel
Dimensions 483(W) × 44(H) × 32(D)mm

Note : Specifications are subject to change without notice