


## WAD-610D ALC Audio Distribution Amplifier (Digital)




WAD-610D ALC A.D.A. (Digital)

사용자가 선택한 각 설정 SW 값에 따라 자동으로 Gain을 조정해 주는 ALC(Automatic Level Control) 기능을 보유한 Audio 분배기로서, Audio Level 변동이 심한 신호의 출력 Level을 자동으로 일정하게 유지시켜 주기 위하여 사용하는 장비이다. 입력신호와 출력신호는 모두 Balance 방식으로 구성되어 있으며, 1 개의 입력신호는 6개의 출력신호로 분배된다.

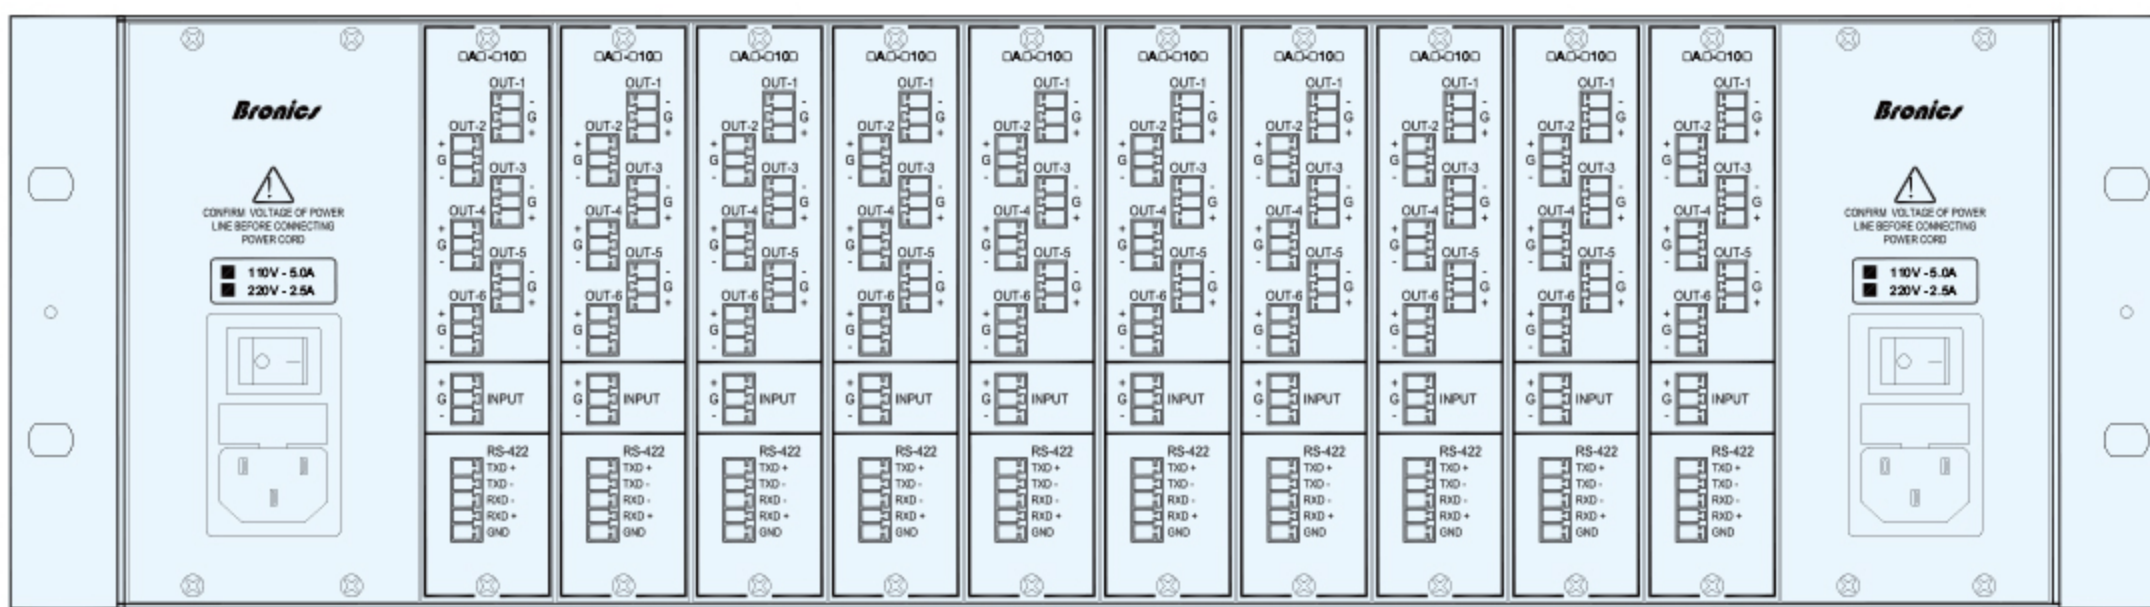

Rear View

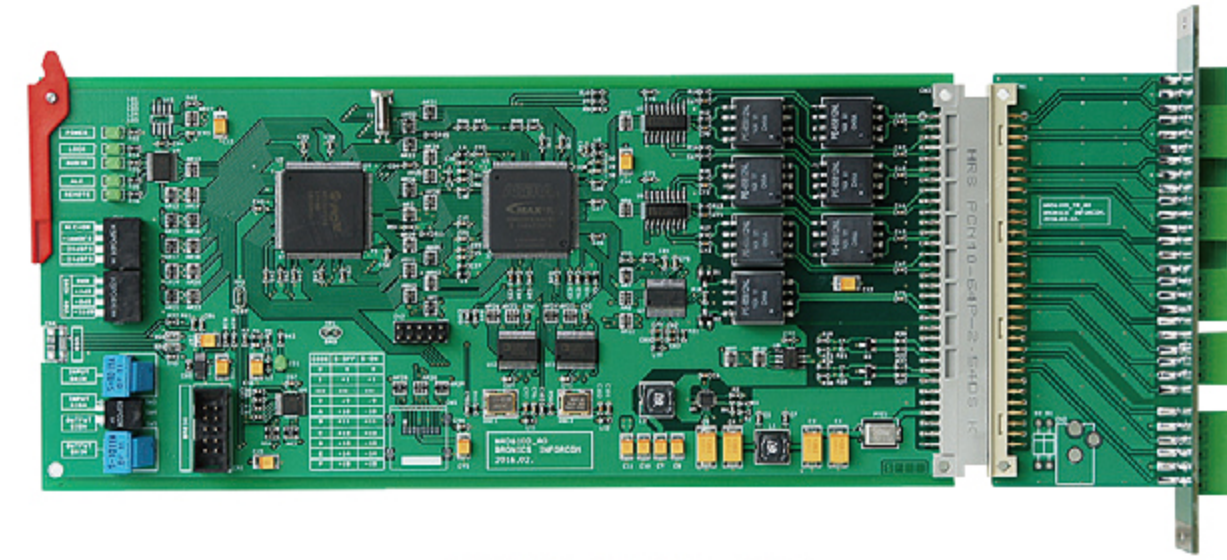

WAD-610D-AO

### Features

- 4 Step Gain Set
- 3 Step ALC Set
- ALC On/Off
- 6 Outputs / Module
- 10 Module of frame (Max)
- Redundant Power Supply
- 19" 3U Rack Unit Type

### Ordering Information

- WAD-610D      Digital ALC Distribution Amplifier
- Option          1 ~ 10 CH
- Option          Redundant Power

### Technical Specification

#### Input

Format	AES/EBU
Channel	1CH
Level	3.5Vp-p nominal
Impedance	110Ω Transformer Balanced
Connector	3-Pin Screw Terminal

#### Output

Format	AES/EBU
Channel	6CH
Level	3.5Vp-p nominal
Impedance	110Ω Transformer Balanced
Connector	3-Pin Screw Terminal

#### Control

Gain Adjustment	0, +4, +8, +16dB
ALC Set	-24, -20, -16dBFS & On/Off
ALC Range	-34dB to -2dB (32dB ALC, Set Level 기준)

#### General

Power	AC 100~240V 50/60Hz
Dimensions	483(W) x 132.5(H) x 300(D)mm